




### Characteristics

KH PACK WS (Wet Strength) is wood free, white, machine finished wrapping paper with **high resistance against the penetration of grease** and **higher resistance against the penetration of water with increased wet strength**. The technical characteristics of KH PACK WS are the result of one or both sides online coating process.

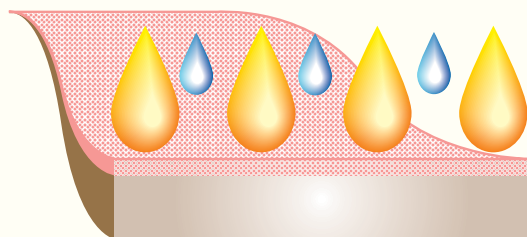

### End Use

KH PACK WS is recommended to use for the **primary food packaging** (fats, cheese), for the **conversion to paper bags, boxes and trays** and for the **production of pressed paper goods** (table cloth, settings). It is possible to laminate KH PACK WS with other materials such as aluminium and plastic foil, paper and corrugated board. For gluing common synthetic adhesives or adhesives based on modified starches could be used. KH PACK WS is suitable for printing, using standard printing techniques.

### Quality and Environment

The health compliance and the suitability for primary food packaging is certified by both ISEGA, FDA and GOSPA. KH PACK WS is fully recyclable.



Technical Data	Unit	Standard	Values					
			32	40	50	60	70	80
Substance	gsm	ISO 536	32	40	50	60	70	80
Breaking length	km	ISO 1924/2	11,5	11,0	10,5	10,5	10,0	10,0
Bursting strength	kPa	ISO 2758	150	180	210	250	300	350
Greaseproofness	-	NFA test	4 - 11					
Wet breaking length	km	ISO 3781	2,0					
Whiteness (ISO R <sub>475</sub> )	%	ISO 2169	83					

### Additional Services

As KH PACK WS offers such a vast range of possible end uses the parameters indicated at the table should be considered as average, as they may be amended in accordance with specific application. KH PACK WS is delivered in reels or sheets. Printing up to four colours, which are approved for food packaging, can be provided by the flexography printer.